



L1 - PIM ENCLOSURE

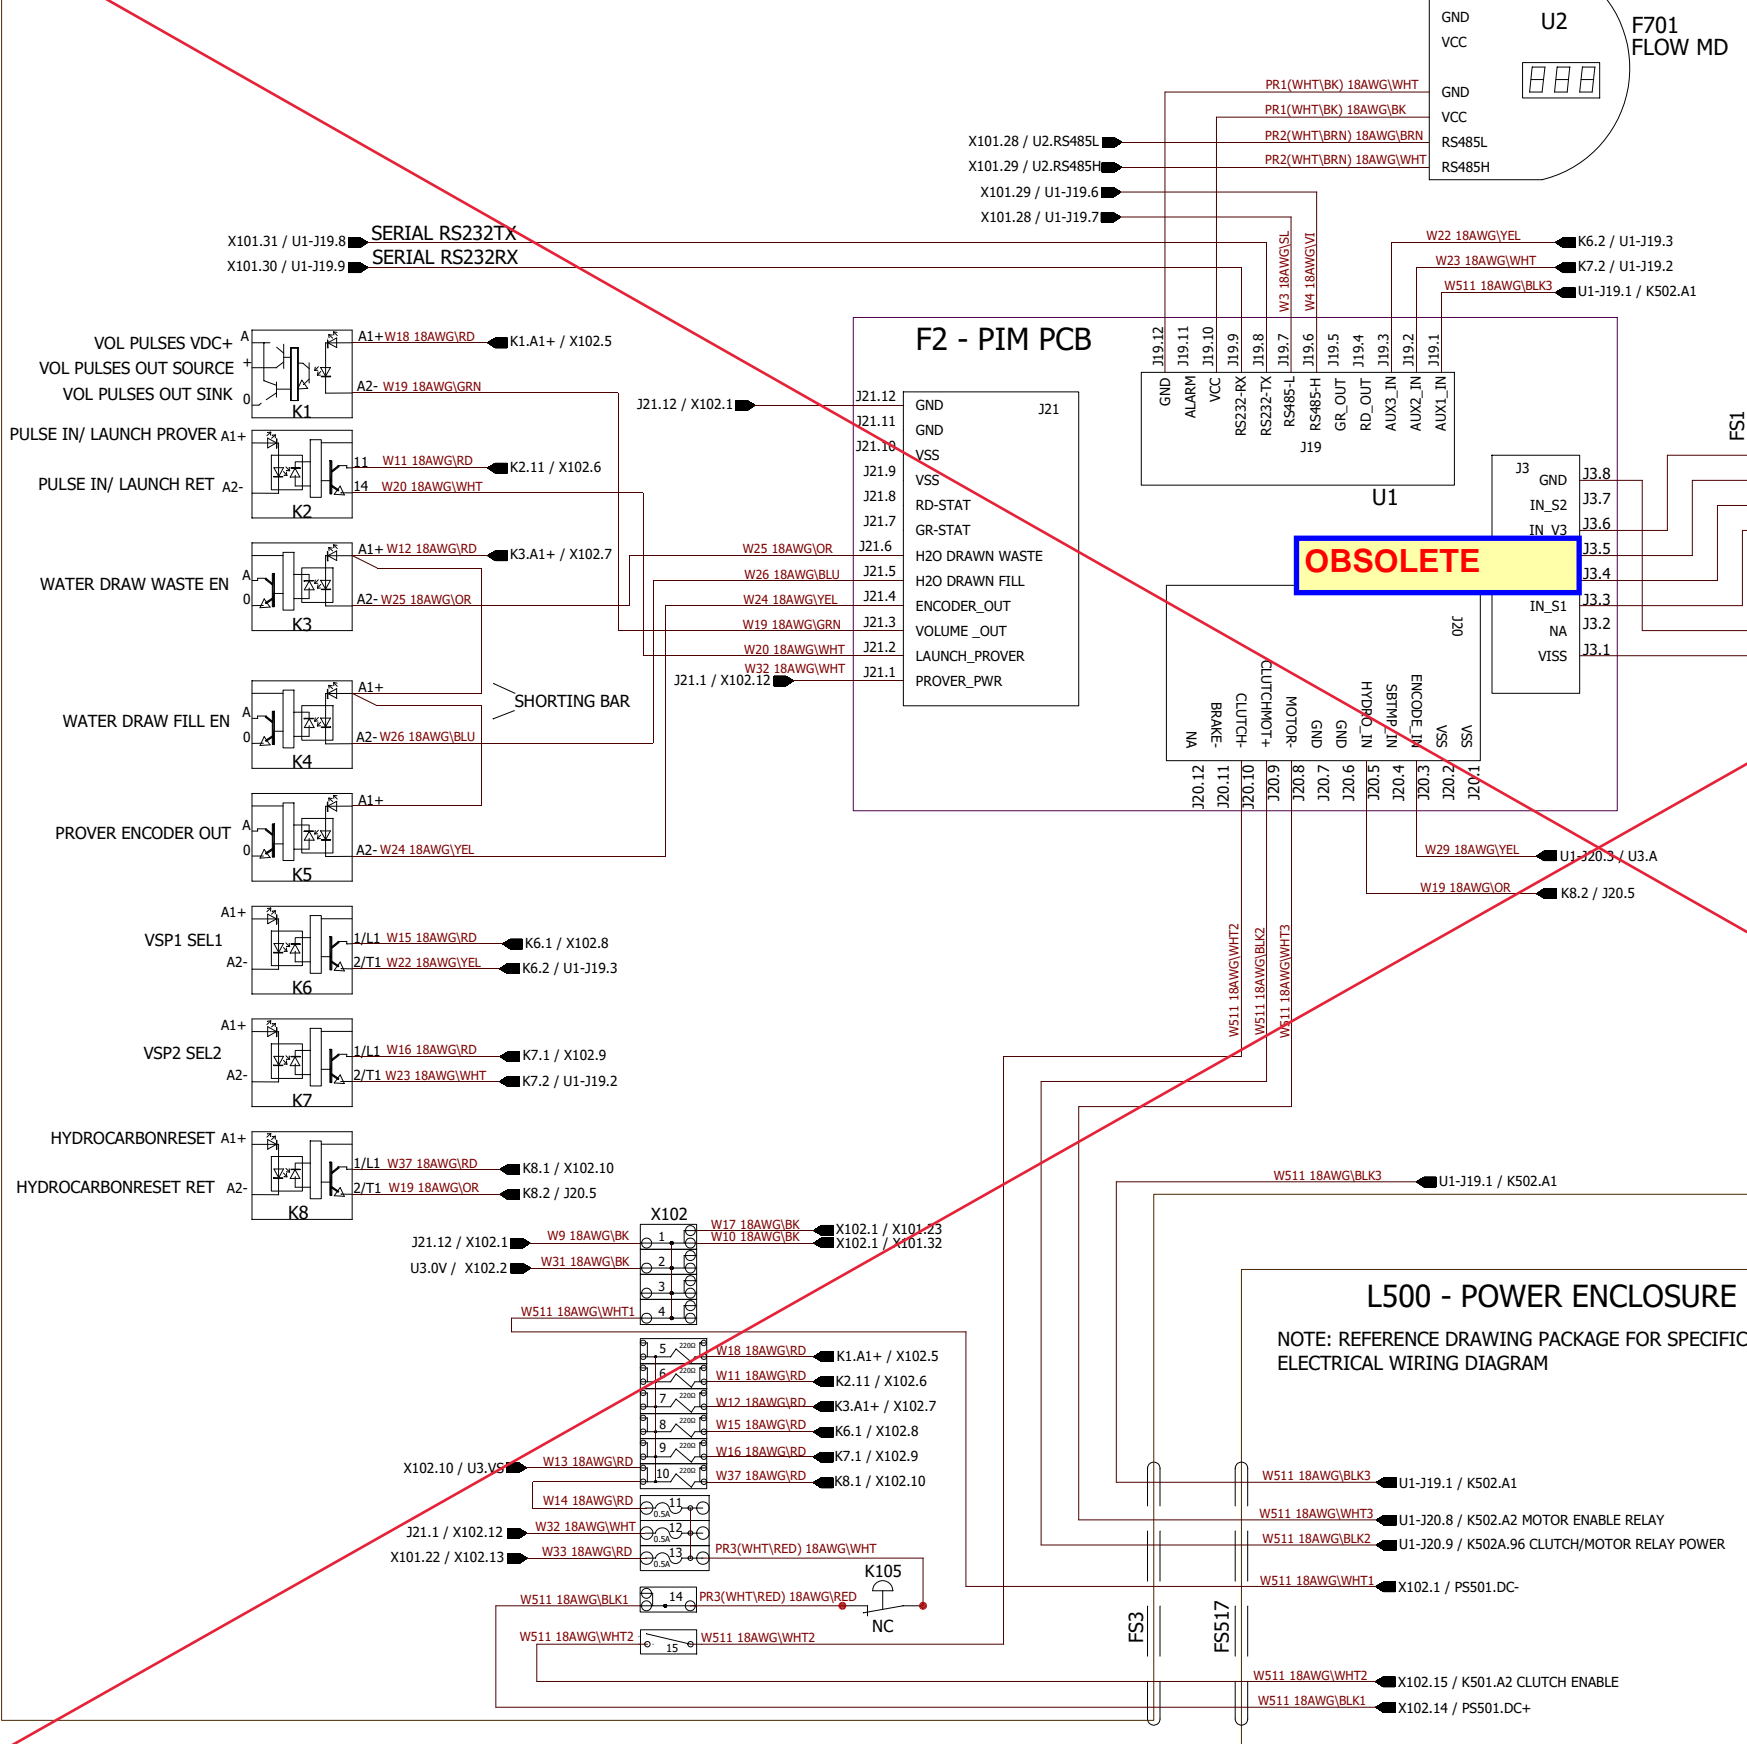

L2 - PROVER DRIVE OPTICAL SWITCH SYSTEM

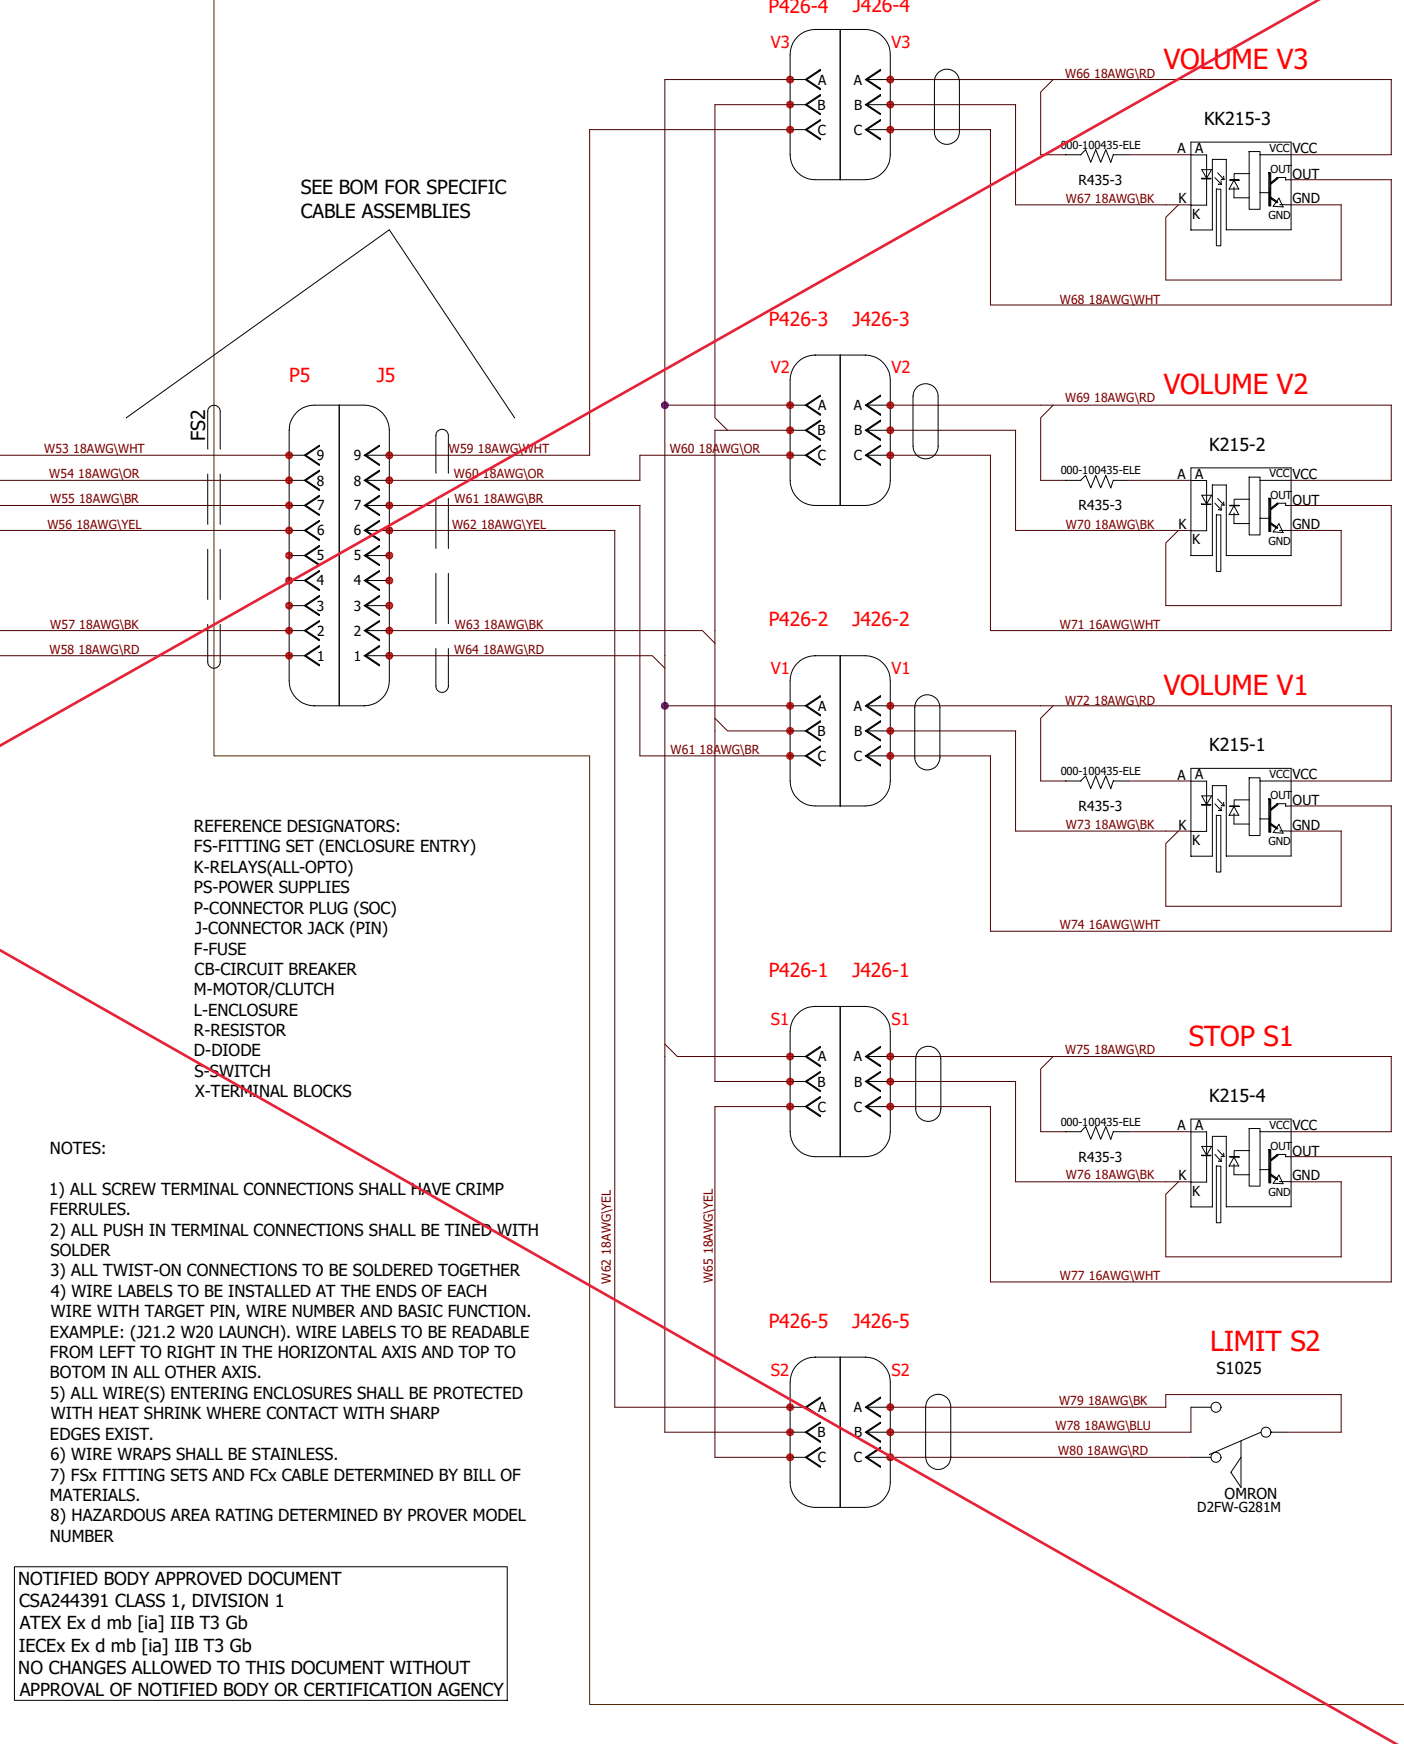

OBSOLETE

- REFERENCE DESIGNATORS:
 FS-FITTING SET (ENCLOSURE ENTRY)
 K-RELAYS(ALL-OPTO)
 PS-POWER SUPPLIES
 P-CONNECTOR PLUG (SOC)
 J-CONNECTOR JACK (PIN)
 F-FUSE
 CB-CIRCUIT BREAKER
 M-MOTOR/CLUTCH
 L-ENCLOSURE
 R-RESISTOR
 D-DIODE
 S-SWITCH
 X-TERMINAL BLOCKS

- NOTES:
 1) ALL SCREW TERMINAL CONNECTIONS SHALL HAVE CRIMP FERRULES.
 2) ALL PUSH IN TERMINAL CONNECTIONS SHALL BE TINNED WITH SOLDER
 3) ALL TWIST-ON CONNECTIONS TO BE SOLDERED TOGETHER
 4) WIRE LABELS TO BE INSTALLED AT THE ENDS OF EACH WIRE WITH TARGET PIN, WIRE NUMBER AND BASIC FUNCTION. EXAMPLE: (J21.2 W20 LAUNCH). WIRE LABELS TO BE READABLE FROM LEFT TO RIGHT IN THE HORIZONTAL AXIS AND TOP TO BOTTOM IN ALL OTHER AXIS.
 5) ALL WIRE(S) ENTERING ENCLOSURES SHALL BE PROTECTED WITH HEAT SHRINK WHERE CONTACT WITH SHARP EDGES EXIST.
 6) WIRE WRAPS SHALL BE STAINLESS.
 7) FSx FITTING SETS AND FCx CABLE DETERMINED BY BILL OF MATERIALS.
 8) HAZARDOUS AREA RATING DETERMINED BY PROVER MODEL NUMBER

NOTIFIED BODY APPROVED DOCUMENT
 CSA244391 CLASS 1, DIVISION 1
 ATEX Ex d mb [ia] IIB T3 Gb
 IECEx Ex d mb [ia] IIB T3 Gb
 NO CHANGES ALLOWED TO THIS DOCUMENT WITHOUT APPROVAL OF NOTIFIED BODY OR CERTIFICATION AGENCY

Flow Management Devices, LLC
 5225 S 37th St, Suite 4
 Phoenix, Az 85040
 602-233-9885

PROVER WIRING DIAGRAM

	NAME	DATE	TITLE:
LAST REVISED	Insu.Lee	9/14/2020	SYSTEM-WIRING-MAIN GEN 3
DRAWN	Rob.Kalis	9/22/2017	P/N: 000-112786-DOC
CHECKED			MODEL#:
SO#:			
			REVISION
			E

